

RE-557P / RE-717P Series

Addressable Manual Pull Station

General

Addressable Manual Pull Station is a high quality non-toxic die-cast manual pull station. Low profile design and smooth edges offer an attractive yet functional design. All components are pre-painted or have plated surfaces to inhibit corrosion. The RE-557P Series Manual pull station is unbeatable with 10 Amp snap action switch offered in all possible contact arrangements (including gold contacts). The RE-557P Series pull station can be used with or without a break glass rod, with replacement requiring no special tools. And pull station should be connected to the compatible control panel. The address for this device shall be configured by using the 8-way DIP switch and utilise a single address.



Features

- Complies UL 38 8th edition.
- DIP Switches for addressing.
- SLC communication with the panel.
- Lift and pull.
- Break glass cover.
- All stations offer hex screw or key lock access.
- Low Standby Current.

Construction Material



- Painted Die Cast Housing.
- 14 Ga plated steel black plate.
- Corrosion Inhibited surfaces.
- Terminal block (4 Position).
- Single Gang Mounting.
- 10 A, 120VAC snap Action Switch (S.P.S.T.).
- Enclosure Complies IP 40 as per IEC standard 60529.

Specification

Electrical Specification

Switch	10A@120 VAC
Operating Voltage	17 -32 VDC
Quiescent Current	0.68 mA
Alarm Current	2 mA
Temperature	0 – 49°C
Relative Humidity	0 - 93% non-condensing
Connection	2.5mm ² Max (12AWG)
Dimension	3.2W X 4.75L X 0.87D in
Weight	15.5 oz / 420 grams

Wiring Diagram

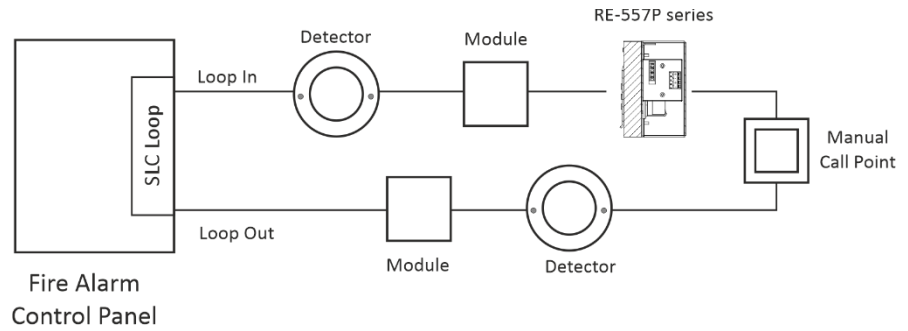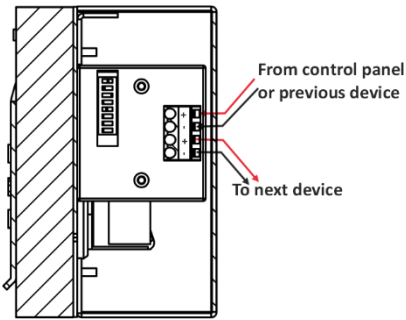

Connect the Loop Positive & Negative wires to SLC IN Terminal, observing the polarity. The wiring terminal accepts solid or stranded cables up to 2.5 mm².

Compatible Panels

Models	Description
<i>Aaral X4</i>	Analogue Addressable Fire Alarm Control Panel expandable upto 4 loops
<i>Aaral X8</i>	Analogue Addressable Fire Alarm Control Panel expandable upto 8 loops

Ordering Information

Models	Color	Description
RE-557PS / RE-717PS	Red	Addressable Manual Pull station – Single action - Alarm
RE-557PD – R / RE-717PD - R	Red	Addressable Manual Pull station – Dual action - Alarm
RE-557PD – G / RE-717PD - G	Green	Addressable Manual Pull station – Dual action - Release
RE-557PD – Y / RE-717PD - Y	Yellow	Addressable Manual Pull station – Dual action - Abort

India

RAVEL ELECTRONICS PVT LTD.,
(An ISO 9001 Company)
150A, Electronics Industrial Estate, Perungudi,
Chennai – 600 096, India.
E-mail: marketing@ravelfire.com Web: www.ravelfire.com

United Kingdom

RAVEL ELECTRONICS LTD.,
Unit 11, Chancel Industrial Estate, Newhall street,
Willenhall WV13 1NX, West Midlands, United Kingdom.
E-mail: info@ravelfire.co.uk Web: www.ravelfire.co.uk

USA

RAVEL AMERICAS INC.,
2855 NW 112th Ave ST#2 Miami,
Doral, Florida 33172, USA.