

RE-2APS Power Supply Panel



Product Overview

The RE-2APS is compact and cost effective 2 Amps power supply with build-in charger. It may be connect to the any 24 Volt Fire alarm control panel or may be stand-alone for the primary applications like Notification appliance circuit expansion or auxiliary power to support 24 Volt system accessories. It provides regulated and filtered 24 VDC power to NAC's and it also contains a battery charger capable of charging up to 14 Ah batteries.

Features

- * Operates on 220V, A.C supply.
- * Battery backup with built in charging.
- * Low battery visual warning with audible tone.
- * DC Output indication.

Electrical Specification:

Mains

220 VAC, 50 Hz +10%, -15%.
Wire size: 1.5 Sq. mm with 600V insulation

Battery (Lead Acid only)

Charging Voltage: 27.9 VDC.
Charging Current: 800mA Max
System Quiescent Current: 35mA

Output Voltage

24VDC @ 2A Max.


Dimension

350 Width x 300 Height x 100 Depth (mm)

Weight


7 Kg Max.

RE-2APS-PANEL MOUNTING DIMENSION DETAIL

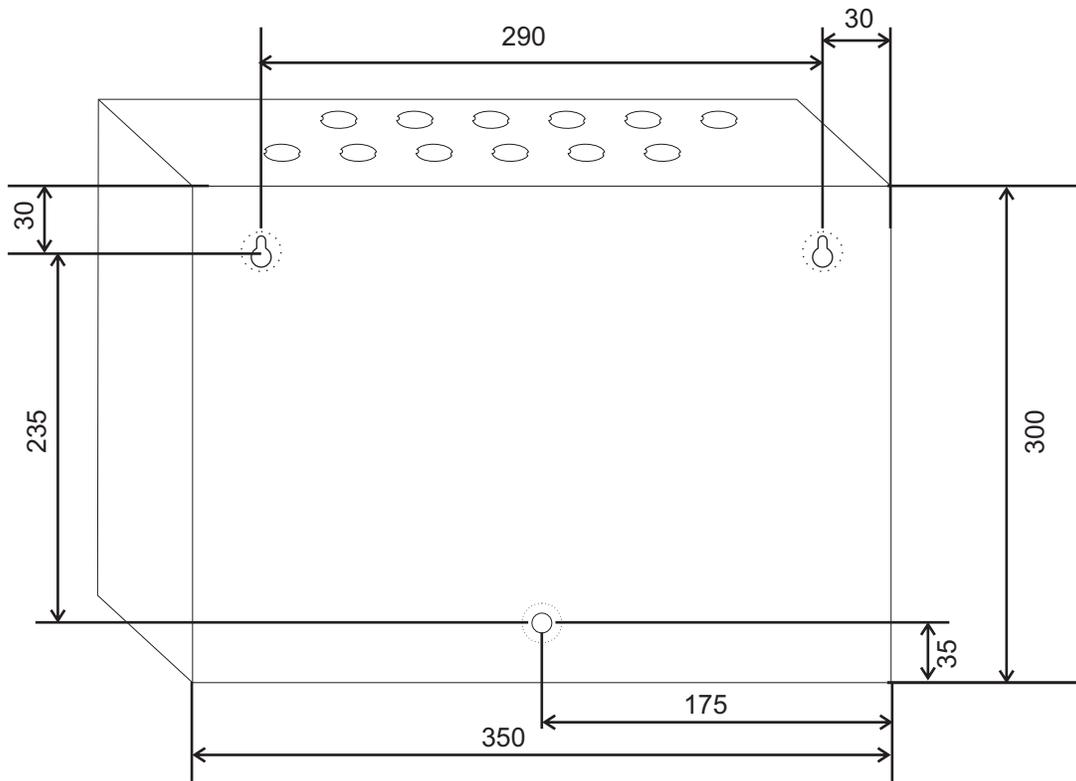

ALL DIMENSIONS ARE IN MM

Terminal Detail

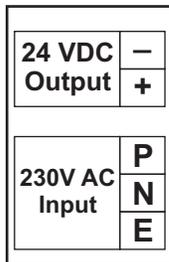

Ordering Information

Model	Description
RE-2APS	2 Amps Power Supply

India:

RAVEL ELECTRONICS PVT LTD.,
 (An ISO 9001 Certified Company)
 150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.
 E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,
 Unit 11, Chancel Industrial Estate, Newhall street,
 Willenhall WV13 1NX, West Midlands, United Kingdom.
 E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk