


RE-716SF

Flame Proof Hooter

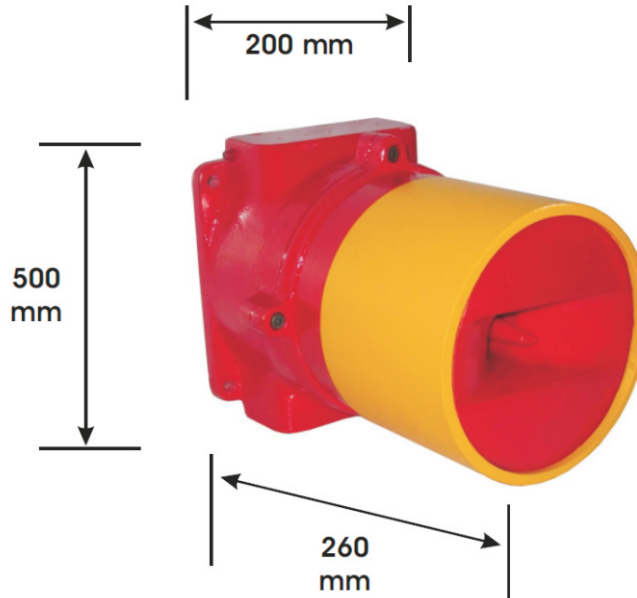

Technical Data

Aux. Supply	:	230 VAC OR 24VDC
Power consumption	:	450 mA @ 24VDC & 80 mA @ 230VAC
Operating Temp.	:	Up to 55°C
Humidity	:	90% at 40°C
Enclosure	:	LM6, Aluminum
Coating	:	Powder coted
Dimension	:	As per drawing
Application	:	Hazardous area
Gas group	:	IIA, IIB, Zone 1 & Zone 2
Weight	:	6 to 7 Kg aprox.
Terminals	:	Up to 2.5 sqmm.
Cable entry	:	Max. 6 Nos. 3/4" ET
Mounting	:	Wall mounting / slab mounting type
Flasher	:	OPTIONAL [LED TYPE]

India:

RAVEL ELECTRONICS PVT LTD.,

(An ISO 9001 Company)

150A, Electronics Industrial Estate, Perungudi, Chennai - 96 .India.
E-Mail: marketing@ravelfire.com; Web : www.ravelfire.com

United Kingdom:

RAVEL ELECTRONICS LTD.,

Unit 11, Chancel Industrial Estate, Newhall street,
Willenhall WV13 1NX, West Midlands, United Kingdom.
E-mail: info@ravelfire.co.uk ;Web: www.ravelfire.co.uk