

SILENT KNIGHT PULLSTATION

Addressable Single Action and Dual Action Pull Stations

The SK-PULL-SA is a single action pull station requiring only one motion to activate the station. The SK-PULL-DA is a dual action pull station requiring two motions to activate the station. Both pull stations are designed to work with Honeywell Silent Knight series fire alarm control panels (FACPs).

INSTALLATION

The SK-PULL-SA and SK-PULL-DA can be surface mounted to an SB-I/O surface back box or semi-flush mounted on a standard single-gang with a minimum depth of 2.13" (5.40 cm) or double gang or 4" (10.61 cm) square electrical box. You can also use the optional (System Sensor® PN BG-TR) trim ring if the station is being semi-flush mounted.

COMPATIBILITY

The SK-PULL-SA and SK-PULL-DA are compatible with the following Honeywell Silent Knight Series FACPs:

- 6808U
- 6820U
- 6820UEVS

FEATURES & BENEFITS

- Analog communications.
- Dual-color LED is visible through handle of station blinks green to indicate normal operation and remains steady red in an alarm condition.
- Key operated test and reset lock using lock plate actuator.
- Key matches compatible FACP locks.
- Shell, door, and handle molded from durable LEXAN®.
- Design to meet UL requirements.
- UL Listed
- FM approved



SK-PULL-SA.



SK-PULL-DA.

SPECIFICATIONS

Physical: 5.5" H x 4" D (14cm x 10.2cm)

Shipping Weight: 5.4oz


Housing Material: LEXAN polycarbonate resin

LED: Bi-Color

Blinking Green: Normal

Steady Red: Alarm

Switch: Single pole, single throw (SPST) normally open (N/O) switch which closes upon activation of the pull station

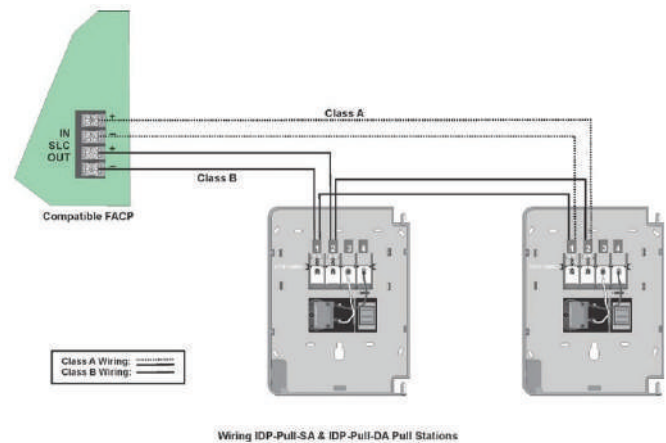

ELECTRICAL RATINGS

Operating Voltage: 15 – 32VDC

SLC Standby and Alarm Current: 375mA and 5 mA

Wire Gauge: Up to 12AWG (3.1 mm²)

ENVIRONMENTAL

Operating Temperature: 32°-120°F (0°C – 49°C)

Humidity: 10 to 93% non-condensing)

ORDERING INFORMATION

SK-PULL-SA. Single Action Pull station

SK-PULL-DA. Dual Action Pull station

ACCESSORIES

BG-TR: Optional trim ring.

SB-I/O: Surface backbox, indoor/outdoor.

Unless otherwise noted, specifications apply to SK-PULL-SA. and SK-PULL-DA.

For a complete listing of all compliance approvals and certifications, please visit <https://buildings.honeywell.com>. Silent Knight™ is a trademark of Honeywell International, Inc. This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For Technical Support, please call 0008000502167.

For more information,

<https://honeywellbuildings.in>

Tel: +91 124 4975000

Email: BuildingAutomation.FireIndia@Honeywell.com

Honeywell Building Automation

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002, Haryana, India
<https://www.honeywellbuildings.in/>

© 2025 Honeywell International Inc.
All specifications are subject to change
without notice.

